

18200W

AC-Only Emergency Light (Wet Location)

Product Description

The 18200 Series Exit Combo is an AC only emergency lighting unit that is housed in an ABS, corrosion-resistant UV stabilized enclosure making it a durable option for wet location applications. It is available in white with red or green lettering and offers one faceplate, an LED indicator light and a push to test switch.

Electrical

- AC only or self-powered models
- Universal 120/277VAC operation
- Extremely low operating costs
- 80-Year light source life expectancy
- Meets NFPA Life Safety 101, NEC, OSHA, local and state codes
- Premium grade Ni-Cad rechargeable battery

Construction

- ABS, corrosion-resistant UV stabilized enclosure
- Removable directional indicators
- Wet location listed
- Red or green text with 6" letter height
- Single face configuration only

Installation

- Surface mounting with four screws and anchors

PRODUCT INFORMATION



Input Voltage (V):	120-277
Power Draw (W):	4 watts
Emergency Battery:	90 minutes

Project

Catalog

Type

Date

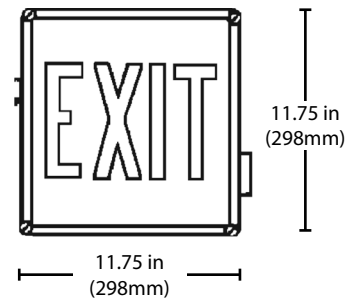

Ordering Information

Product No.	Housing Color	Lettering Color	No. Faceplates	Emergency Operation	Lamp Type
18200WLREM	White	Red	1	90 Min.	LED
18200WLGEM	White	Green	1	90 Min.	LED

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.